FYH
Finer Power Transmissions P/L | www.finerpt.com
Bearing Housings
T300 Series

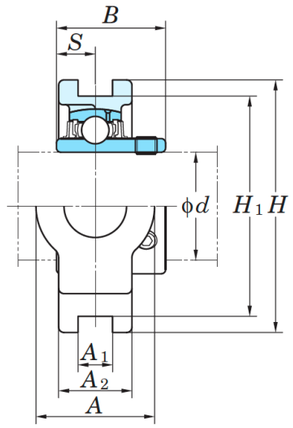

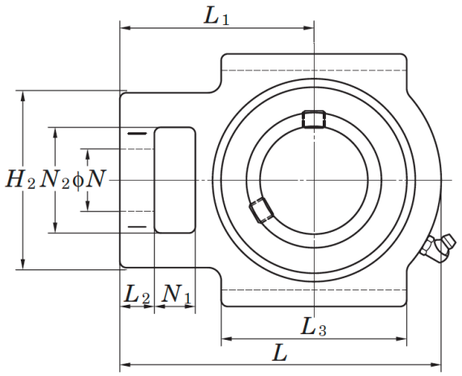

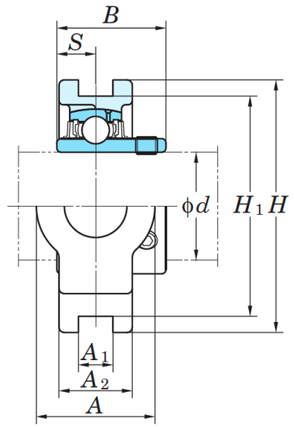

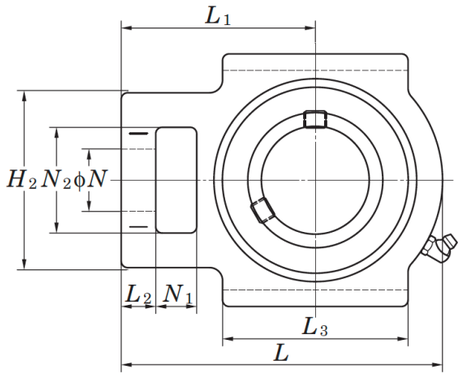

Housing Number	Dimensions																																	
	A		A1		A2		H		H1		H2		L		L1		L2		L3		N		N1		N2		B		S	
	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch
T305	36	1 13/32	12	15/32	26	1 1/32	89	3 1/2	80	3 5/32	62	2 7/16	122	4 13/16	76	3	12	15/32	65	2 9/16	26	1 1/32	16	5/8	36	1 13/32	38	1.496	15	0.591
T306	41	1 5/8	16	5/8	28	1 3/32	100	3 15/16	90	3 35/64	70	2 3/4	137	5 13/32	85	3 11/32	14	9/16	74	2 29/32	28	1 3/32	18	23/32	41	1 5/8	43	1.693	17	0.669
T307	45	1 25/32	16	5/8	32	1 1/4	111	4 3/8	100	3 15/16	75	2 15/16	150	5 29/32	94	3 11/16	15	19/32	80	3 5/32	30	1 3/16	20	25/32	45	1 25/32	48	1.89	19	0.748
T308	50	1 31/32	18	45/64	34	1 11/32	124	4 7/8	112	4 13/32	83	3 9/32	162	6 3/8	100	3 15/16	17	21/32	89	3 1/2	32	1 1/4	22	7/8	50	1 31/32	52	2.047	19	0.748
T309	55	2 5/32	18	45/64	38	1 1/2	138	5 7/16	125	4 59/64	90	3 17/32	178	7	110	4 11/32	18	23/32	97	3 13/16	34	1 11/32	24	15/16	55	2 5/32	57	2.244	22	0.866
T310	61	2 13/32	20	25/32	40	1 9/16	151	5 15/16	140	5 33/64	98	3 27/32	191	7 17/32	117	4 19/32	20	25/32	106	4 3/16	37	1 15/32	27	1 1/16	61	2 13/32	61	2.402	22	0.866
T311	66	2 19/32	22	55/64	44	1 23/32	163	6 13/32	150	5 29/32	105	4 1/8	207	8 5/32	127	5	21	13/16	115	4 17/32	39	1 17/32	29	1 5/32	66	2 19/32	66	2.598	25	0.984
T312	71	2 25/32	22	55/64	46	1 13/16	178	7	160	6 19/64	113	4 7/16	220	8 21/32	135	5 5/16	23	29/32	123	4 27/32	41	1 5/8	31	1 7/32	71	2 25/32	71	2.795	26	1.024
T313	80	3 5/32	26	1 1/32	50	1 31/32	190	7 15/32	170	6 11/16	116	4 9/16	238	9 3/8	146	5 3/4	25	31/32	134	5 9/32	43	1 11/16	32	1 1/4	70	2 3/4	75	2.953	30	1.181
T314	90	3 17/32	26	1 1/32	52	2 1/16	202	7 15/16	180	7 3/32	130	5 1/8	252	9 29/32	155	6 3/32	25	31/32	140	5 1/2	46	1 13/16	36	1 13/32	85	3 11/32	78	3.071	33	1.299
T315	90	3 17/32	26	1 1/32	55	2 5/32	216	8 1/2	192	7 9/16	132	5 3/16	262	10 5/16	160	6 5/16	25	31/32	150	5 29/32	46	1 13/16	36	1 13/32	85	3 11/32	82	3.228	32	1.26
T316	102	4 1/32	30	1 3/16	60	2 3/8	230	9 1/16	204	8 1/32	150	5 29/32	282	11 3/32	174	6 27/32	28	1 3/32	160	6 5/16	53	2 3/32	42	1 21/32	98	3 27/32	86	3.386	34	1.339
T317	102	4 1/32	32	1 17/64	64	2 17/32	240	9 7/16	214	8 27/64	152	5 31/32	298	11 23/32	183	7 7/32	30	1 3/16	170	6 11/16	53	2 3/32	42	1 21/32	98	3 27/32	96	3.78	40	1.575
T318	110	4 11/32	32	1 17/64	66	2 19/32	255	10 1/32	228	8 31/32	160	6 5/16	312	12 9/32	192	7 9/16	30	1 3/16	175	6 7/8	57	2 1/4	46	1 13/16	106	4 3/16	96	3.78	40	1.575
T320	120	4 23/32	35	1 3/8	75	2 15/16	290	11 13/32	260	10 15/64	175	6 7/8	345	13 19/32	210	8 9/32	32	1 1/4	200	7 7/8	59	2 5/16	48	1 7/8	115	4 17/32	108	4.252	42	1.654
T322	130	5 1/8	38	1 1/2	80	3 5/32	320	12 19/32	285	11 7/32	185	7 9/32	385	15 5/32	235	9 1/4	38	1 1/2	215	8 15/32	65	2 9/16	52	2 1/16	125	4 29/32	117	4.606	46	1.811
T324	140	5 1/2	45	1 49/64	90	3 17/32	355	13 31/32	320	12 9/32	210	8 9/32	432	17	267	10 1/2	42	1 21/32	230	9 1/16	70	2 3/4	60	2 3/8	140	5 1/2	126	4.961	51	2.008
T326	150	5 29/32	50	1 31/32	100	3 15/16	385	15 5/32	350	13 25/32	220	8 21/32	465	18 5/16	285	11 7/32	45	1 25/32	240	9 7/16	75	2 15/16	65	2 9/16	150	5 29/32	135	5.315	54	2.126
T328	155	6 3/32	50	1 31/32	100	3 15/16	415	16 11/32	380	14 1/4	230	9 1/16	515	20 9/32	315	12 13/32	50	1 31/32	255	10 1/32	80	3 5/32	70	2 3/4	160	6 5/16	145	5.709	59	2.323

Every effort has been taken to ensure that the data listed in this catalogue is correct.
Finer Power Transmissions P/L will not accept liability for any damage or loss caused as a result of the data in this catalogue.
Every effort has been taken to ensure that the data listed in this catalogue is correct.
Finer Power Transmissions P/L will not accept liability for any damage or loss caused as a result of the data in this catalogue.